


PLA Marble

/Acrylonitrile Butadiene Styrene/



- ✓ High Impact Resistance
- ✓ High Light Transmission
- ✓ Good Toughness
- ✓ Good Fluidity

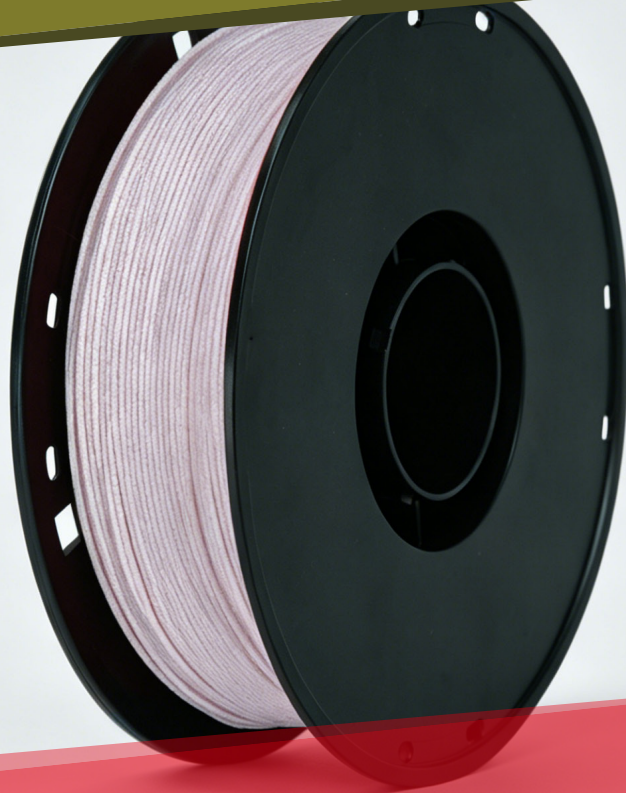

Material Overview

This product is made from PLA material and features a high-quality marble-like texture. Its surface is smooth with no visible layer lines, closely mimicking real marble sculptures. The filament provides excellent printability, with low warpage and good resistance to deformation.



Filament Diameter	1.75mm/2.85mm/ 3.50mm
Net Weight	1KG \ Inner Box Dimension: 206*71*208mm \ G.W.: 1.35KG
Package	1KG*10PCs \ Outer Carton Dimension: 382*226*433mm \ G.W.: 14KG/CTN

■ Printing Tips

- Best printing temperature ranges from 190°C to 230°C
- Best phototype can be achieved through 50°C drying for 2-4 hours
- Print Temp: 190-210°C 50-150mm/s; Print Temp: 210-230°C 150-300mm/s;
Print Temp: 230-260°C 300-600mm/s
- Platform Temp.: Glue required if not heated, glue unrequired if heated 50-60°C
- Bubble: no bubble
- (190°C, 2.16kg) * Breaking elongation: 4%

■ Colors

Nature (Standardized pantone colors are available)

■ Data Table

Physical Properties	Standard Value	Test Method
Density	1.22-1.27g /cm ³	ASTM D792
MFR (190°C, 2.16KG)	5-7g / 10 minutes	ASTM D1238
Water absorption (saturation, 23°C)	0.3%	ASTM D570
Mechanical Properties	Standard Value	Test Method
Tensile strength	≥50 MPa	ASTM D638
Flexural strength	≥50 MPa	ASTM D638
Tensile modulus	≥3,200 MPa	ASTM D638
Notch impact strength (IZOD, 23°C)	≥3KJ/m ²	ISO 180
Elongation at break	≥3.0%	ASTM D638
Accuracy	Standard Value	Test Method
Filament diameter	1.75mm/2.85mm/3.00mm	Q/WT 001-2014
Roundness deviation	≤0.02mm	Q/WT 001-2014